

45 DEG CHAMFER
 20 HIGH X 10 DEPTH COLLAR

150mm ϕ CYLINDRICAL STEEL POLE FILLED WITH CONCRETE. FINISH SHALL BE DULUX ACRATHANE - SPARKLING ALUMINIUM


ALLOW FOR 100mm GROUT BETWEEN BOLLARD AND SELECTED SURROUNDING PAVEMENT MATERIAL

CONCRETE PAVEMENT

300mm DIA 32Mpa CONCRETE FOOTING. DEPTH WILL VARY DEPENDING LOCATION AND SUSCEPTIBILITY TO DAMAGE.

ELEVATION
 NOT TO SCALE

MAX. 1600 CENTRES

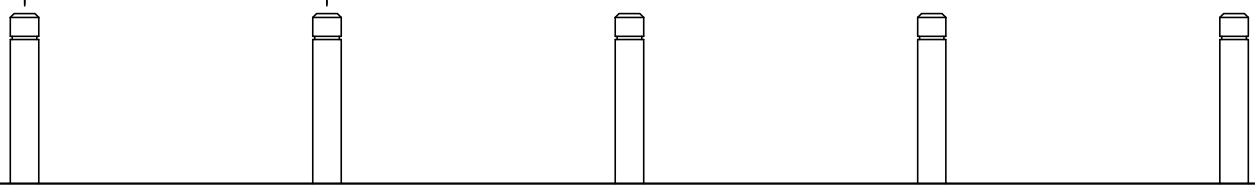

INSTALLATION ELEVATION
 SCALE 1 : 50



GREATER DANDENONG

CYLINDRICAL STEEL BOLLARD
 150mm DIA. WITH REBATE COLLAR

LAST UPDATED - SEPTEMBER 2014

INFRASTRUCTURE PLANNING

SD 910-A