

45 DEG CHAMFER

18 HIGH X 10 DEPTH COLLAR

50 DIA GAL PIPE POWDERCATED DULUX CHARCOAL

150X150 FINE SAWN CYPRESS PINE BOLLARD. HEIGHT AND FOOTING DEPTH WILL SUIT STANDARD 1500 LONG POST

ENSURE BACKFILL FINISHES FLUSH WITH SURROUNDING GROUND


FOR INTERNAL POST USE COMPACTED CEMENT STABILISED EARTH BACKFILL. (5 PARTS EARTH TO 1 PART CEMENT)

FOR END POSTS USE 25MPA CONCRETE FOOTING TO DIMENSIONS AS SHOWN


NOTE: THIS STYLE OF FENCE SHALL NOT BE USED WITHIN 9 METERS OF TRAFFIC LANES.

ELEVATION
SCALE 1 : 10

MAX. 3000 CENTRES

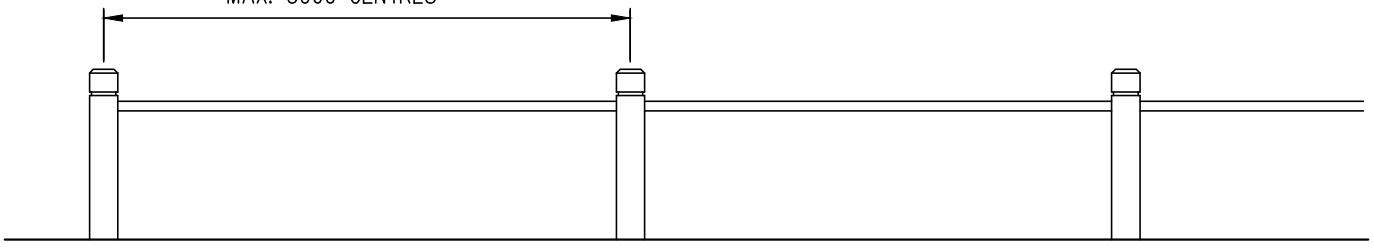

INSTALLATION ELEVATION
SCALE 1 : 50



GREATER DANDENONG

150 x 150 PARK PERIMETER POST AND PIPE FENCE

LAST UPDATED - SEPTEMBER 2014
INFRASTRUCTURE PLANNING
SD 903-A