


50mm DIA PVC CLASS 12 SERVICE CONDUIT, 10.6m LONG WITH
MIN 600mm COVER AND A FALL OF 75mm OVER FULL LENGTH

TYPICAL CROSS SECTION

NOT TO SCALE

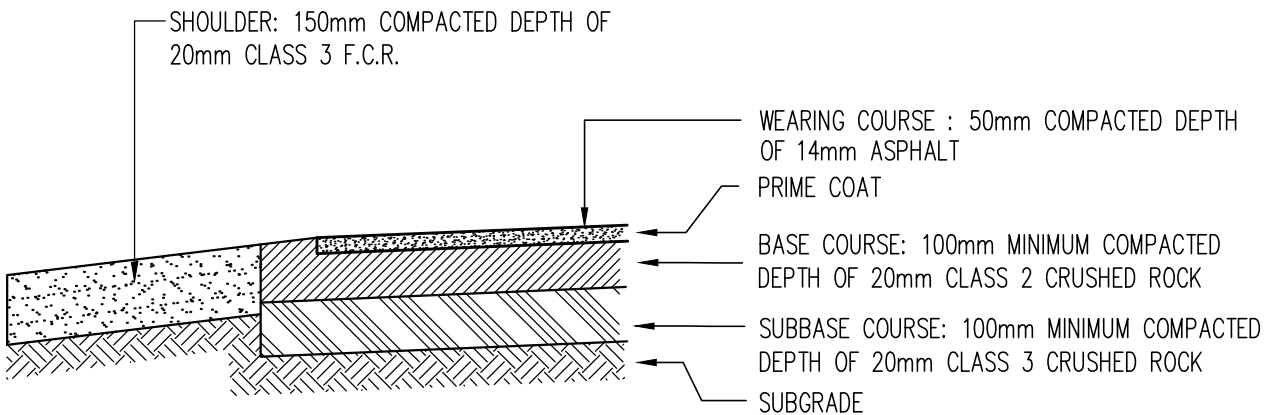

MINIMUM RURAL ROAD PAVEMENT

NOT TO SCALE

NOTES

- NOTWITHSTANDING COUNCIL'S MINIMUM PAVEMENT REQUIREMENTS THE PROPOSED PAVEMENT IS TO BE DESIGNED BY A SUITABLY QUALIFIED GEOTECHNICAL AND/OR PAVEMENTS ENGINEER IN ACCORDANCE WITH THE FOLLOWING TEXTS:
 - PAVEMENT DESIGN – A GUIDE FOR THE STRUCTURAL DESIGN OF ROAD PAVEMENTS, AUSTRROADS 1992
 - THE APRG REPORT NO. 21 – A GUIDE TO THE DESIGN OF NEW PAVEMENTS FOR LIGHT TRAFFIC
 - THE GUIDE TO STABILISATION IN ROADWORKS, AAPA, AUSTSTAB AND AUSTRROADS 1998
 - SEALED LOCAL ROADS MANUAL, ARRB 1995
- ALL SOIL TESTING DONE FOR THE PURPOSES OF PAVEMENT DESIGN SHALL BE PERFORMED BY NATA ACCREDITED LABORATORIES, WITH ACCREDITATION TO PERFORM ALL OF THE INDIVIDUAL TESTS THAT ARE REQUIRED. TESTING SHALL ALSO CONFORM TO THE FOLLOWING AUSTRALIAN STANDARDS:
 - AS1726 GEOTECHNICAL SITE INVESTIGATIONS
 - AS1289 TESTING OF SOILS FOR ENGINEERING PURPOSES
 - AS1141 TESTING OF AGGREGATES



GREATER DANDENONG

RURAL ROADS
TYPICAL GEOMETRIC CROSS SECTION

LAST UPDATED – SEPTEMBER 2014

INFRASTRUCTURE PLANNING

SD 014–A