


GENERAL NOTES:

1. THIS DETAIL IS INTENDED FOR ADVANCED TREES NOMINALLY FROM 1.8–2.2m HIGH AT TIME OF PLANTING.
2. TREES TO BE INSPECTED BY COUNCIL'S ARBORIST PRIOR TO PLANTING.
3. TREES WITH POOR FORM AND/OR WHICH ARE ROOT BOUND WILL NOT BE ACCEPTED.
4. TREE LOCATIONS SHALL BE CONFIRMED WITH THE SUPERINTENDENT PRIOR TO PLANTING.
5. TREES SHALL BE WATERED IMMEDIATELY AFTER PLANTING. ENSURE THE ROOT BALL AND SURROUNDING AREA IS FULLY SOAKED.

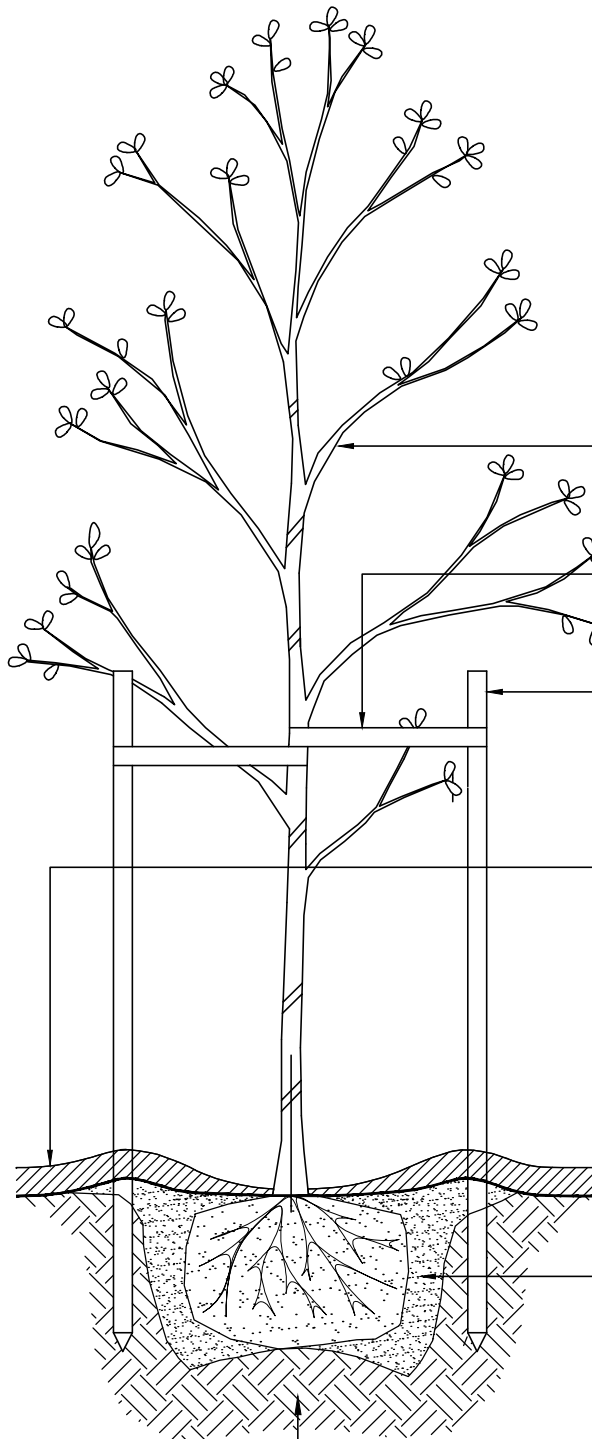

ADVANCED TREE MIN. 45 LITRE CONTAINER, 28–32mm CALIPER.

50 WIDE FABRIC TIE STAPLED TO STAKES, (TRUNK SHOULD STILL MOVE SLIGHTLY).

2 NO. 50x50x1500 OB HARDWOOD STAKES DRIVEN 450mm MIN. INTO SOLID UNDISTURBED GROUND, CLEAR OF ROOT BALL, PLACED VERTICALLY TO TRUNK AND PARALLEL TO ROAD

100mm DEPTH OF MULCH AS SPECIFIED & 50mm CLEAR OF TRUNK. IN LAWN AREAS FORM 1000mmØ MULCH RING.

INSTALL PLASTIC 'WATER-WELL' AROUND TRUNK & OVER ROOT BALL. WATER IN TREE WHEN PLANTED, (50 LITRES)

EXCAVATE SLOPING SHALLOW PLANTING HOLE 2 TO 3 TIMES WIDTH OF ROOT BALL DOME BASE & SET TREE AS HIGH AS PRACTICABLE ABOVE SUB-GRADE. BACKFILL HOLE WITH EXISTING CLEAN EXCAVATED TOP-SOIL.

BASE OF HOLE 100mm TO BE MOUNDED AND ROOTBALL SHOULD BE SITTING ON SOLID UNDISTURBED GROUND

ADVANCED TREE PLANTING DETAIL

NOT TO SCALE



GREATER DANDENONG

ADVANCED TREE PLANTING DETAIL

LAST UPDATED – SEPTEMBER 2014

INFRASTRUCTURE PLANNING

SD 907–A