


**PLAN**  
SCALE 1:50

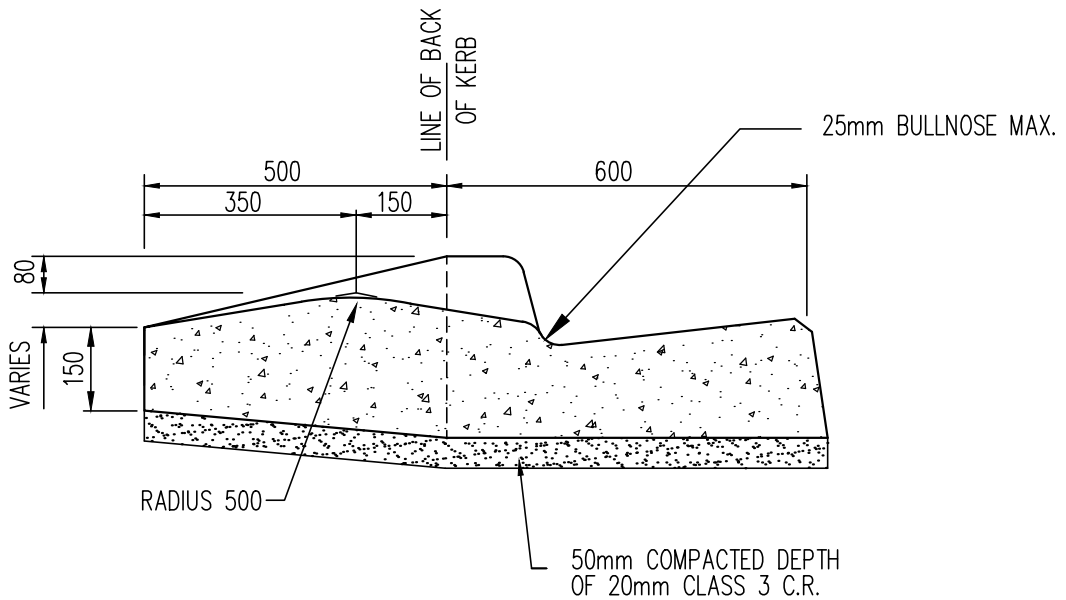

**SECTION A-A**  
SCALE 1:10

**NOTES**

1. CONSTRUCTION JOINT LOCATIONS ARE INDICATED THUS .....
2. EXISTING KERB & CHANNEL TO BE SAWCUT AND REMOVED.
3. ASPHALT IS TO BE REINSTATED IF DAMAGED.
4. CONCRETE STRENGTH F'C = 25MPa, SLUMP = 80mm MAX.
5. PROVIDE DOWELL CONNECTIONS (TIED JOINT) TO EXISTING KERB AND CHANNEL BAYS AS PER SD 704



**GREATER DANDENONG**

**MODIFIED KERB AND CHANNEL – CONCRETE LAYBACK  
REVERSE FALL  
SD 400 BARRIER KERB AND CHANNEL – RESIDENTIAL**

LAST UPDATED – APRIL 2015

INFRASTRUCTURE PLANNING

**SD 410-B**