


BORING UNDER UNKERBED SEALED PAVEMENT

NOT TO SCALE

COMPACTED 20mm CLASS 3  
CRUSHED ROCK, COMPACTED  
IN 150mm LAYERS TO A  
DENSITY OF 98 % MODIFIED  
PROCTOR DENSITY TEST

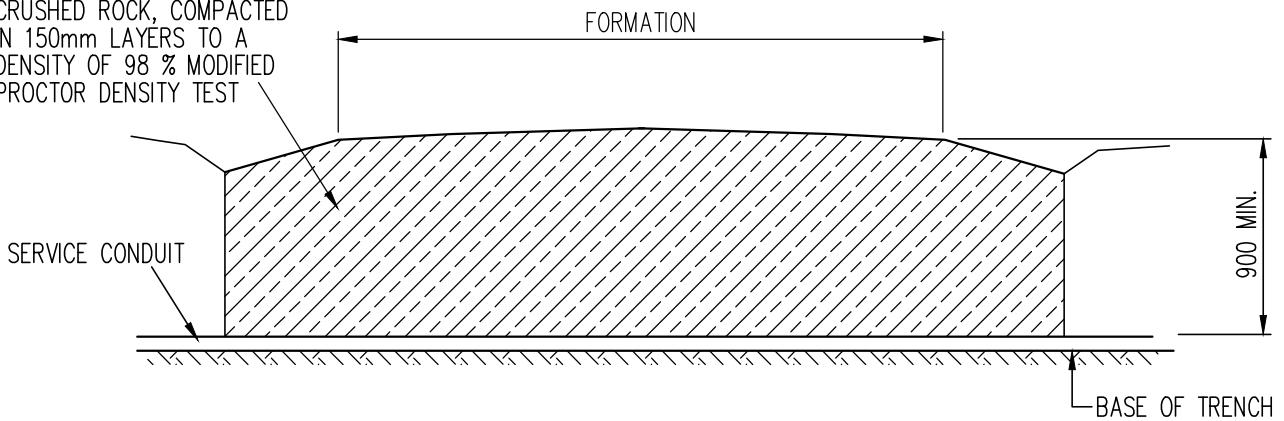

BACKFILLING REQUIREMENTS FOR OPEN TRENCHING UNDER  
UNSEALED ROAD PAVEMENT

NOT TO SCALE



**GREATER DANDENONG**

**CONDITIONS FOR INSTALLATION OF SERVICES  
UNDER SEALED AND UNSEALED ROADS WITH NO  
KERB AND CHANNEL**

LAST UPDATED – SEPTEMBER 2014

INFRASTRUCTURE PLANNING

**SD 708-A**